



**MULTRON** Reflective Beam Detector is a reflective infrared beam smoke detector, which must be used together with reflectors. The number of reflector(s) to be used (1 to 4) depends on the distance of coverage from the detector.


With built-in microprocessor, the detector has capabilities of analysis and judgment. The detector can automatically carry out system adjustment & compensation due to variations in ambience data through fixed algorithm.

The detectors can be used with all major brands of Conventional Fire Alarm Panels.

- **Hassle free alignment, using built-in digital guide display with Laser Beam**
- **Auto-compensation for weaken receiving signals**
- **Fire & Fault Interfacing Relay Output**
- **Users' programmable sensitivity**
- **Self-diagnostic for internal faults**
- **Designed in compliance to EN 54-12: 2002 Standards**
- **LPCB Approved**




1330a-(cl-2)

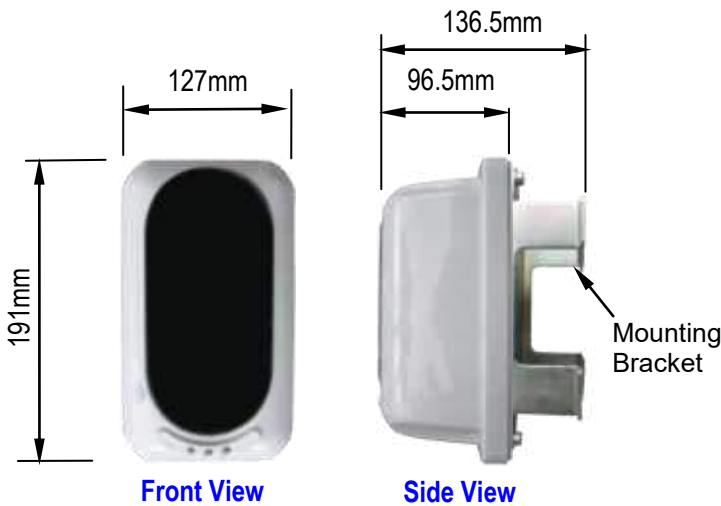

Front View

Side View

### Standard Accessories :-

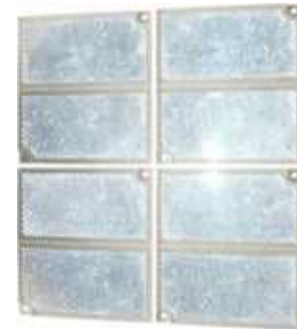

4 pcs. Reflector



1 pc. Mounting Bracket

1 pc. IR Light Filter  
(for site testing simulations)

Technical Specifications	
Operating Voltage	24VDC (Range 20VDC to 28VDC)
Operating Current	Standby Current : ≤ 18mA
	Alarm Current : ≤ 33mA
Detection Range	Distance from 8m to 100m
Monitoring Area	Maximum Area : 14 x 100 = 1400m <sup>2</sup>
	Maximum Width : 14m
Wiring	Non-Polarized Two-Core 24VDC
	Non-Polarized Two-Core Detection Loop
Operating Environment	Temperature Range : -10°C ~ +55°C
	Relative Humidity : ≤ 95% Non-condensation
Weight	650 Gram (with Mounting Bracket)
Material	ABS Plastic
IP Rating	IP30
Colour	Grey with Black Screen

## Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

6395 6868  
6395 6869

info@multron.com  
www.multron.com

